


Amend of bidding documents Group - 2 : Proposed Head Office Structured Network				
S/L	Annexure / Page No	Item /Section	Existing info	Amended Info
1	General Section page : 11	Financial format	Total Cost = (5+6)	Total Cost =((3*4) + 5 + 6)
2	Annexure-02	Scope of work	Fiber Back bone from Data Center Communication Room to Meet me Room.(ground Floor)	Fiber Back bone from Data Center Communication Room to Meet me Room.(Basement 1/2/3)
3	Annexure-02 , Page 1	1. Technical Specification and requirement for Proposed HO Structured Networking (For 14 stored Building).	SPECIFICATIONS : CAT.6A unshielded patch cord 3 & 1 M .	SPECIFICATIONS : CAT 6 unshielded patch cord 3 & 1 M . (Same Change will applicable in all required field in RFP)
4	Annexure-02 , Page 2	Same as above	1.iii : UTP CAT6 Patch Panel, 24 Port, with Modular : CAT.6A Patch Panel Frame for both Unshielded and shielded cable system	1.iii : UTP CAT6 Patch Panel, 24 Port, with Modular : CAT.6 Patch Panel Frame for Unshielded cable system
5	Annexure-02 , Page 3	Same as above	1.vii : Network Rack--22 U :	1.vii : Network Rack--22 U : Floor Stand
6	Annexure-02 , Page 3	Same as above	1.viii : Network Rack -- 15 U	1.vii : Network Rack--15 U : Wall Mount Closed Rack .
7	Annexure-02 , Page 3	2. Dual Fiber Back bone from DC to Each floor with installation (Different path)	2.i Back bone fiber: (Dual fiber connectivity from data center floor to each floor) : Qty : 13*2=26.	2.i Back bone fiber: (Dual fiber connectivity from data center floor to each floor) : Qty : 13*2=26. Total Cable length : 3500 Meter
8	Annexure-02 , Page 4	2.24 Port multimode optical fiber fully loaded patch panel with compatible adapter	2.ii SPECIFICATIONS : Patch panel for Single mode fiber with adapter	2.ii SPECIFICATIONS : Patch panel for Multimode fiber with adapter
9	Annexure-02	Multimode Fiber Patch Cord	not mention in the RFP	30 Pieces 3 Meter SC-LC & 30 Pieces 1 Meter SC-SC Fiber Patch cord .

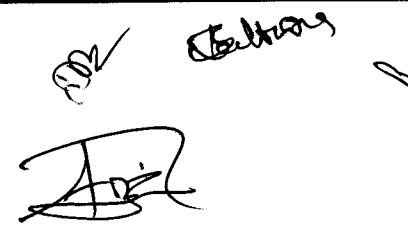

Amend of bidding documents Group - 2 : Proposed Head Office Structured Network				
S/L	Annexure / Page No	Item /Section	Existing info	Amended Info
10	Annexure-02	3 Fiber backbone cable form DC room to meet me room (ground floor)	3.i individual single mode fiber backbone cable form DC room to meet me room (ground floor) Cable length not mentioned in the RFP	3 cables: Total cable length required: 500 meter.

ASG

02

Elabors